

REMOVABLE MOUNT ROOF RACK

HOLDEN VT/VX/VY/VZ COMMODORE WGN 9/97 ONWARDS

HOLDEN VU COMMODORE UTE 12/00 ONWARDS

NOTE: Refer to Owner's Manual for maximum carrying capacity of the vehicle. Weight must NOT exceed lower value.

STEP 1:

- Insert the End Support into the Cross-bar.
- Insert the Nut into the Bottom Slug and then slide both components into the Cross-bar.
- Loosely** fasten using the Security Bolt, Spring Washer and Flat Washer. Assemble as shown in (Fig. 1a) or (Fig. 1b)
- Fit End Cap to each end of the Cross bar.
- Do not fully tighten at this stage.

Commercial Cross-bar

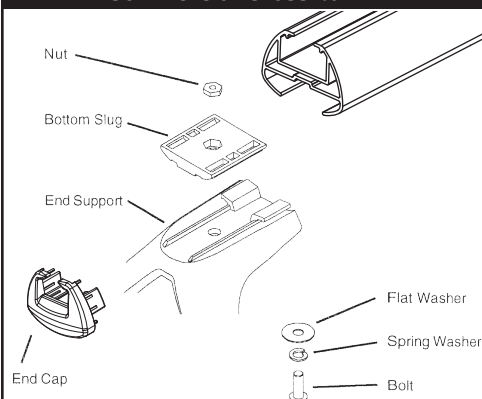


Fig 1a

Sports(RE) 'Global' Cross-bar

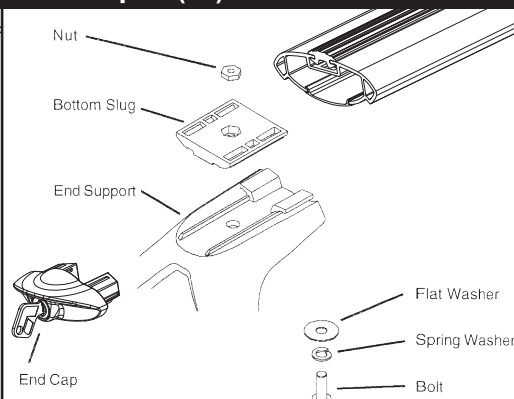


Fig 1b

STEP 2: Placement of rack assembly

- Carefully remove black trim covers from front section of roof to expose metal anchoring lip. (Fig.2b). To remove covers Start at windscreen end, manoeuvre fingers under inside edge of cover and slowly lift upwards, at the same time work your way back along the cover.

NOTE: Take care when removing Trim Covers to avoid damaging white Trim Cover Clips. Covers can not be replaced while rack is fitted. Store covers in a safe place.

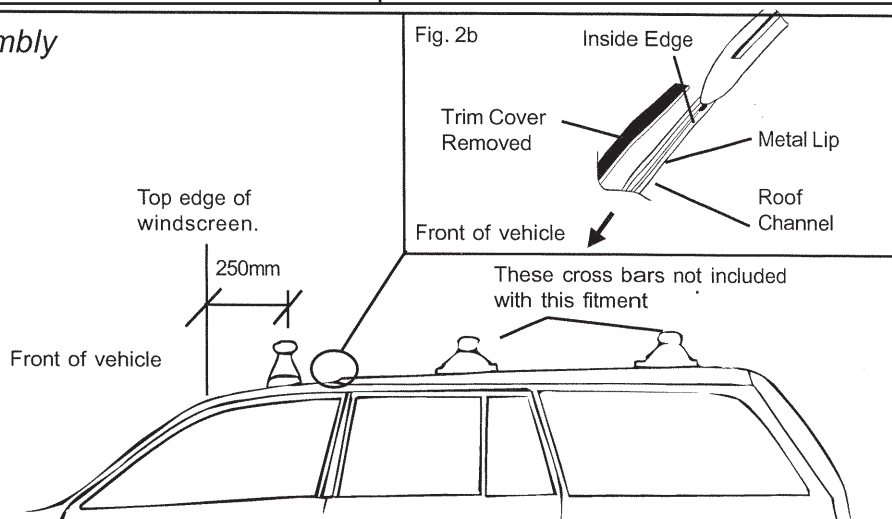


Fig. 2a

Commodore Wagon is shown in this diagram, Please Note that Roof Rack is fitted same way to Commodore Ute.

STEP 3: Fitting Cross Bars to Vehicle.

25kg Limit for this Fitment

- Clip Barrel Nuts into back of End Support. Then fit Rubber Boot onto bottom of End Support. (Fig 3a.).
- Place End Support into roof channel. Refer to (Fig 2a) for recommended cross bar positioning.
- Place Bolt through Locking Strap, then place Locking Strap under Metal Lip, (Fig3b.). Using key provided engage Barrel Nut and tighten three to four turns.
- Check positioning of rack assembly is correct on each side of vehicle. (Fig.2a).
- Tighten all bolts including the End Support to Cross Bar fixing bolts assembled in Step 1.

USAGE INSTRUCTIONS

Refer to Care For Your Racks.

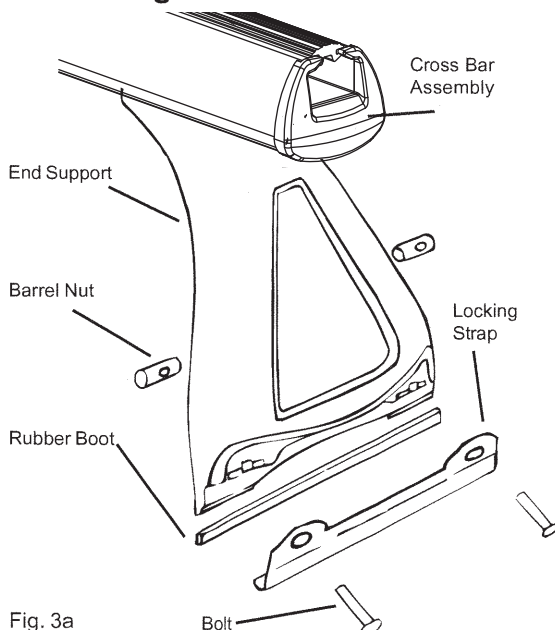


Fig. 3a

NOTE: This fitment does not use a cover over the strap.

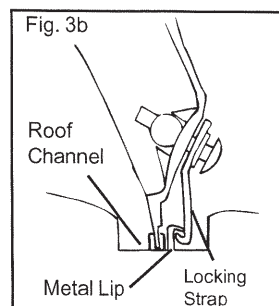


Fig. 3b